RAPID ROLL® DOOR 670
SPECIFICATIONS & OPTIONS

= RECOMMENDED CLEARANCES

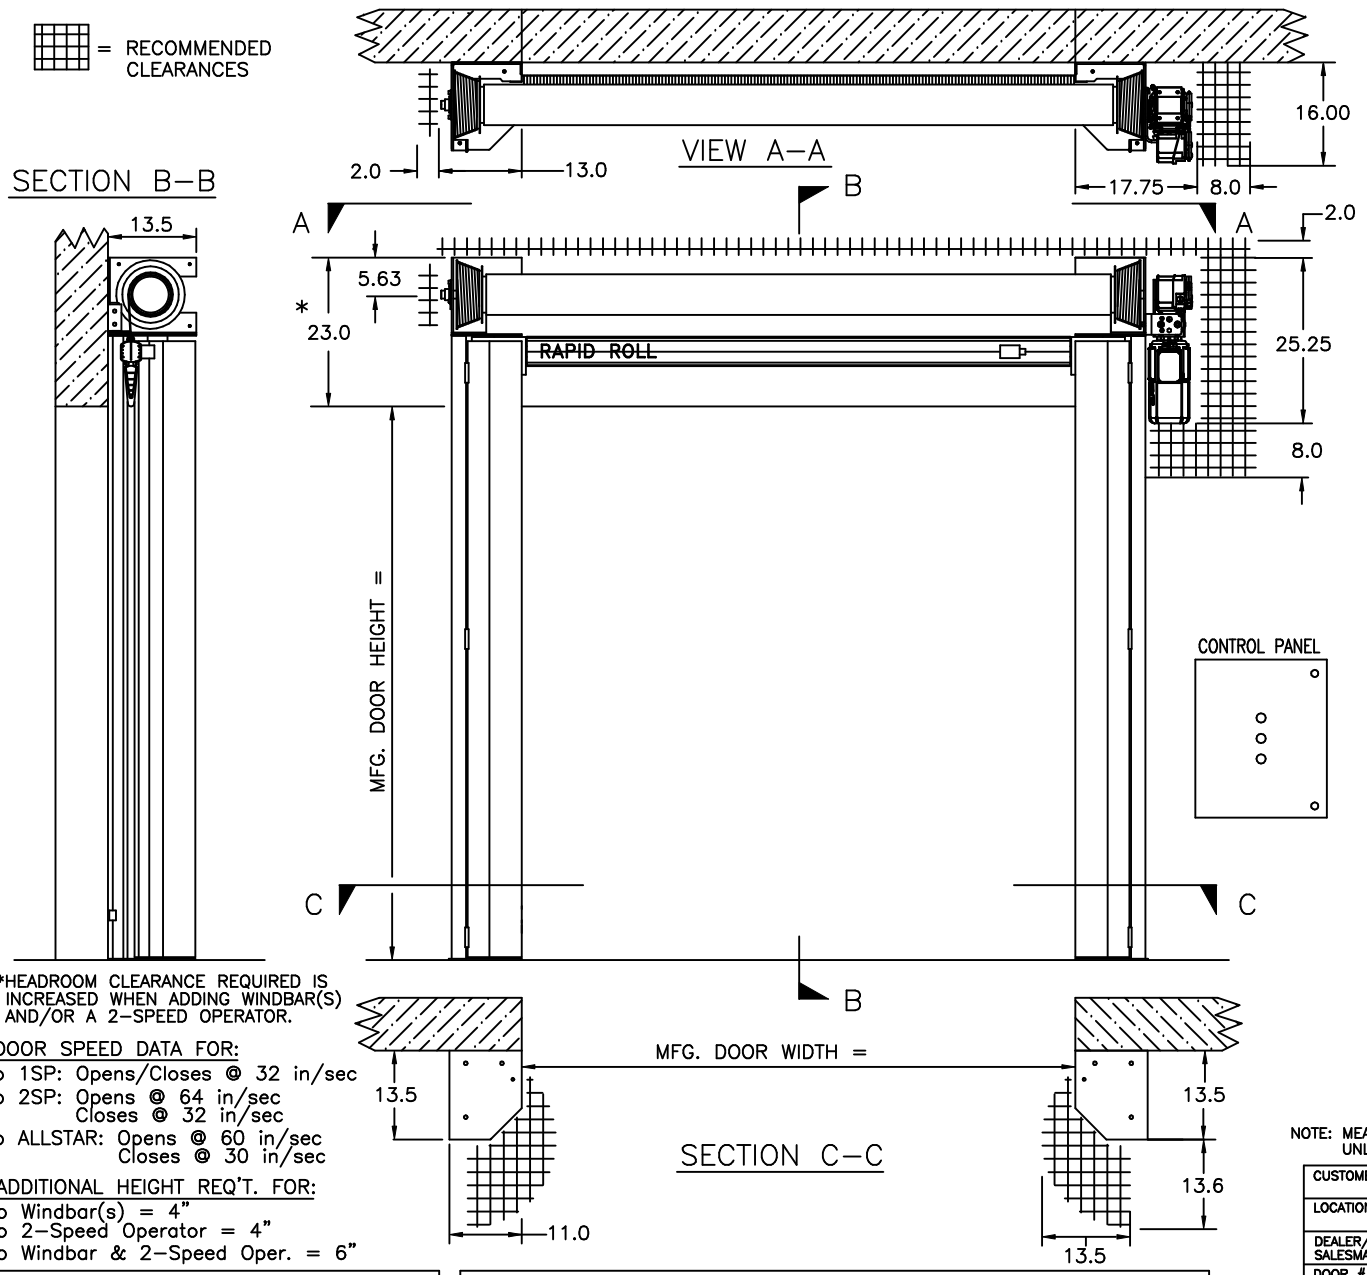

OPENING SIZE	W=	H=	
MFG. DOOR SIZE	W=	H=	
OPERATOR LOCATION	RIGHT–HAND DRIVE		
	LEFT–HAND DRIVE		
OPERATOR SPEED	1 SPEED		
	2 SPEED		
CONTROL PANEL	PLC W/CONTACTORS		
	ALLSTAR WITH LIMIT		
	ALLSTAR WITH ENCODER		
PRIMARY VOLTAGE (3 PHASE)	208 – 240 V		
	440 – 480 V		
	575 V		
DOOR ACTUATOR (Quantity)	1 BUTTON STATION (Std.)		
	PULL SWITCH(s)		
	FLOOR LOOP RECEIVER	1 OR 0	
	PHOTOCELL		
	MOTION DETECTOR(s)		
	RADIO RECEIVER	1 OR 0	
DOOR PANEL	BLUE		
	BROWN		
	GRAY		
	ORANGE		
	WHITE		
	MESH		
SIDE FRAME COLOR	STAINLESS STEEL		
	BLUE (painted Steel)		
	BROWN (painted Steel)		
	SILVER (painted Steel)		
HOOD	FRONT		
	FULL ROLL COVER		
WINBARS	FRONT		
	REAR		
WINDOW	18"x18" WINDOW		
	24" FULL VISION PANEL		
CONTACTLESS SAFETY EDGE			
RAPID RESET			
MANUAL HOIST W/DISCONNECT			
Comments:			
CONTROL PANEL STD POWER SOURCES FOR EXTERNAL DEVICES	110 VAC @ 200 miliamps 24VAC @ 800 miliamps 24VDC @ 100 miliamps		

*HEADROOM CLEARANCE REQUIRED IS INCREASED WHEN ADDING WINDBAR(S) AND/OR A 2–SPEED OPERATOR.

DOOR SPEED DATA FOR:
- o 1SP: Opens/Closes @ 32 in/sec
- o 2SP: Opens @ 64 in/sec, Closes @ 32 in/sec
- o ALLSTAR: Opens @ 60 in/sec, Closes @ 30 in/sec

ADDITIONAL HEIGHT REQ'T. FOR:
- o Windbar(s) = 4"
- o 2–Speed Operator = 4"
- o Windbar & 2–Speed Oper. = 6"

NOTE: MEASUREMENTS ARE IN INCHES UNLESS OTHERWISE NOTED.

CUSTOMER		DRAWN BY	J.C.R.
LOCATION		DATE	10/03
DEALER/ SALESMAN		REVISION	REL
DOOR #	DATE	SCALE	1:20

ALBANY INTERNATIONAL
Nomafa Division

DRAWING NAME: RAPID ROLL DOOR 670

DRAWING NUMBER: 670–0026

APPROVED BY:

APPROVED WITH CHANGES AS NOTED BY: